




◀ INSTRUCTIONS TO USE THE BUCKLE ▶ WITH LASHING TAPE



1 Thread one end of the lashing webbing through the middle of the buckle



2 Make a loop around one end and insert the lashing webbing under the looped end

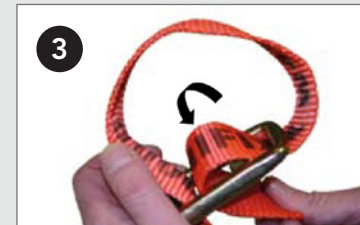

3 Lead the end back through the middle of the buckle



4 Pull the lashing webbing away from the buckle




5 Repeat step 1-4 with the opposite end




6 Pull tight and allow a min. overlap of 25 cm for tensioner use



7 Squeeze the handle of the tensioner and lead the webbing under the break lever



8 Pull the handle wide open and place the top lashing webbing part through the cutter and tensioner slot

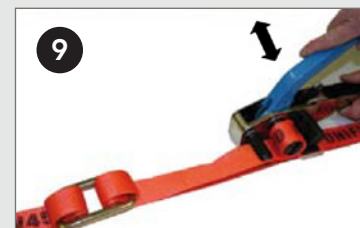

9 Move the handle up and down to tension the lashing webbing; keep min. 8cm overlap from the buckle



10 Squeeze the handle to cut the lashing webbing (10), release the break (11) and remove the tensioner (12)

